

MAESTRO-c Continuous Cartoner

> TECHNICAL SPECIFICATIONS

Motion

Continuous

Dimensions

H = 7' / 2142mm

L = 25.6' / 7823mm

D = 7.6' / 2324mm

Electrical

480 VAC, 3ph, 60Hz

Safety system

Category 3 EN-13849-1 PLd (control reliable)

Air pressure

6 bar

Weight


Approx. 3000kg



A hygienic continuous carton machine to handle small and larger carton sizes, available with dedicated infeed system that can be adapted to different packaging styles and allows for gentle product handling and carton closing. Our MAESTRO-c, capable of producing up to 500 cartons per minute, is available with dedicated infeed systems for bags, flow wrapped products, stick packs, pouches, as well as tailored solutions for your products that require added flexibility and reliability. The entirely servo-driven machine, with stainless steel construction, provides the fastest changeovers along with exceptional accessibility, improved hygiene, ergonomics and build quality. An Intelligent Machine Interface (IMI) platform offers easy navigation, with optional video screens for predictive maintenance and changeover procedures tailored to your application.

> OUTPUT


Speed: Max. 500cpm



Dimensions:

	H	L	D
Min (in/mm)	0.8"/20mm	2"/50mm	2.6"/65mm
Max (in/mm)	5.9"/150mm	12.6"/320mm	14.6"/370mm

Restrictions in carton size combinations apply

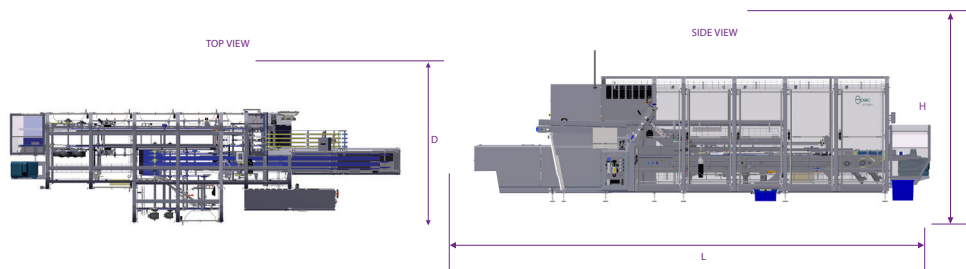


> CAPABILITIES

Infeed



Cartoning



Case Packing



Palletizing



MAESTRO-c Continuous Cartoner



STANDARD FEATURES

- › Ergonomic and hygienic design in stainless steel
- › Intelligent Machine Interface
- › Carton magazine capacity 1500mm/ 59" with height approx.1400mm/ 55"
- › Carton carrying lugs, maximum carton quality guaranteed
- › 2-head rotary feeder with pre break for optimal carton placement
- › Pre-sized carton magazines for quick changeovers
- › Automatic adjustments for basic changeover
- › Open frame design for excellent accessibility
- › Lockable door switches for high end safety
- › Left or right hand execution
- › CE or UL/ CSA certified
- › Open flap detection with reject



OPTIONAL FEATURES

- › Unique infeed systems for your products
- › 5-head rotary feeder for high speed solutions
- › Ergonomic low level carton magazine (height approx. 40"/1000mm)
- › Extension of carton magazine to 2500mm/ 98"
- › Tuck-in flap closure
- › Overhead compression unit (confiner)
- › Washdown version
- › Multiple machine pitches (15", 12", 9", 7.5", 6", 4.5")

All information provided in this document is dependent upon final machine specification and infeed arrangement

6033-05-2020

Part of Mpac



AMERICAS

+1 905 670 7200
sales.americas@mpac-group.com
service.americas@mpac-group.com

EMEA

+31 24 648 66 55
sales.emea@mpac-group.com
service.emea@mpac-group.com

APAC

+66 2 302 1415 / +65 63 39 96 66
sales.asia@mpac-group.com
service.asia@mpac-group.com